XLR8 / OPTION 4 ENCLOSURE

A-01 • Review drawing • Dimensions in inches • Finished liner faces govern

A SIDE SECTION

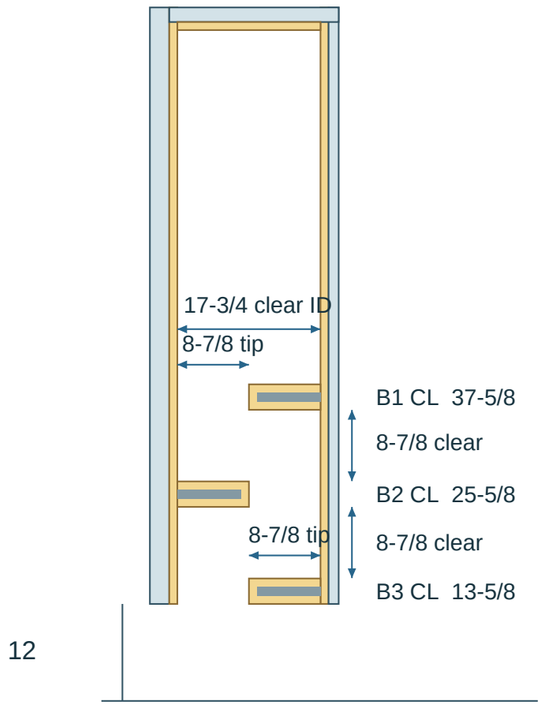

B FRONT ELEVATION

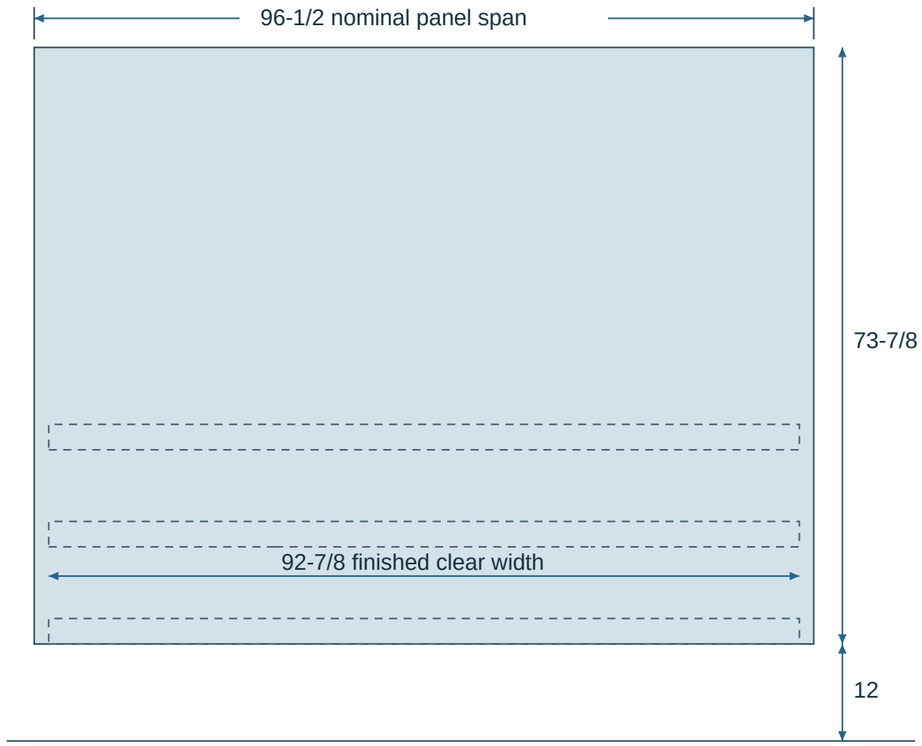

Tree end at left. Dashed outlines show concealed baffles.

C ISOMETRIC CUTAWAY

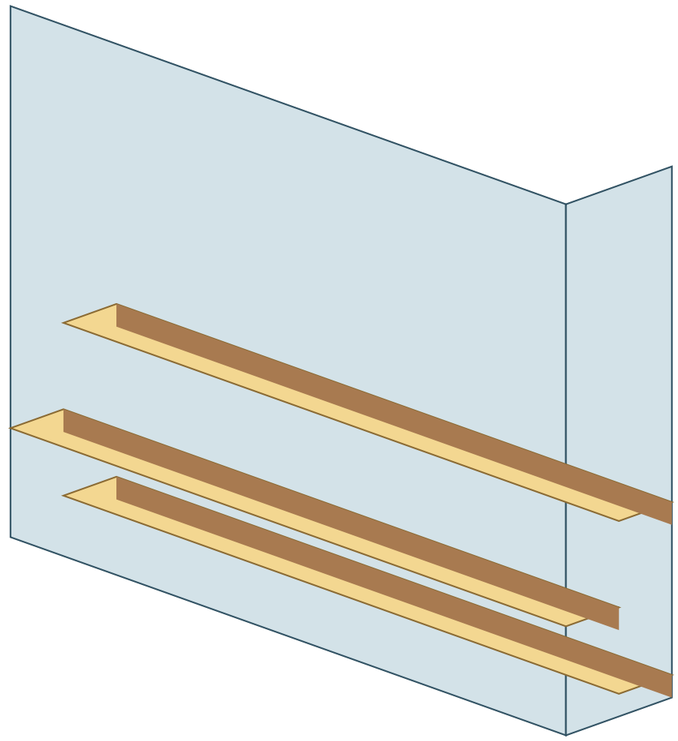

Front panel omitted. Baffles alternate outer / building / outer.

D MATERIALS AND BUILDUP

Baffles 92-7/8 finished span × 8-7/8 finished projection × 3-1/8 thick

1 FRK each face + 1/2 plywood + 5/8 remaining core allowance

1 FRK on free tips, inside the finished projection.

Baffle framing and attachment details are pending.

Walls 1/2-inch plywood over framing with 1-inch interior FRK

Bare model envelopes 1-1/4 front / 1-5/8 ends, including framing allowance

Hold 92-7/8 × 17-3/4 finished ID. Place wall framing outward.

Verify tree separation, existing wall thickness and framing sizes on site.